


Seneca Speeds			
VF Flap 10°	○ <160mph	○ VMC (red line)	○ 80 mph
VF Flap 25°	○ <140 mph	○ VR	○ 80 mph
VF Flap 40°	○ <125 mph	○ IFR Approach	○ 130 mph ○ 110 Kts (SIM)
VLE	○ 150 mph	○ VFR Approach	○ 105 (blue line) ○ 100/95/90
VLO Gear up	○ <125 mph	○ VFE	○ 125 mph (Flap 40°)
VLO Gear down	○ <150 mph	○ VS (MTOW) ○ VSO (MLW)	○ 76 mph ○ 67 mph
VYSE flaps up or VY (blue line)	○ 105 mph ○ 88 Kts (SIM)	○ VX flaps up	○ 90 mph (do not use)
Decision Speed	○ 105 mph	○ VA 4200 lbs ○ VA 2743 lbs	○ 146 mph ○ 133 mph
Flaps up	○ >90 mph	○ VSSE (Vmc+10)	○ 90 mph

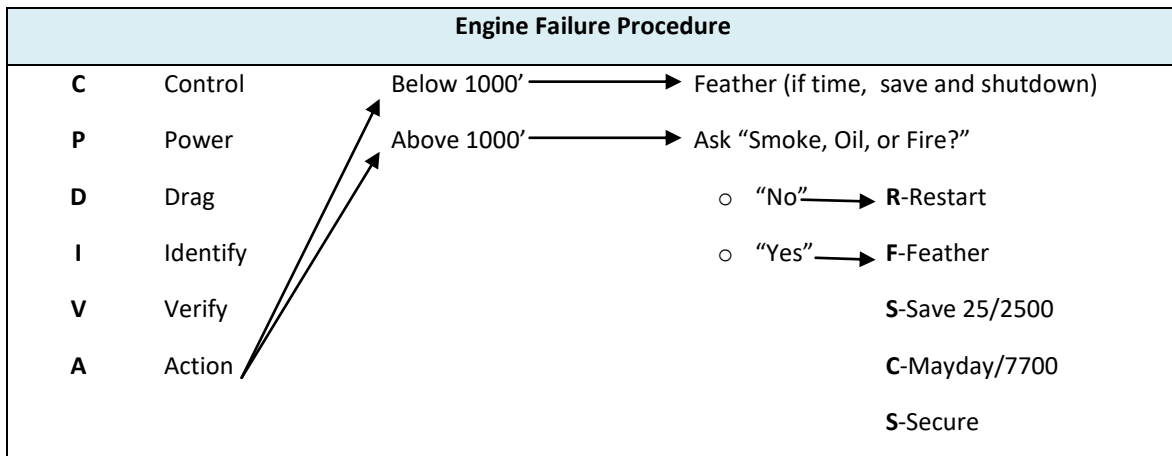

W Weather	M Mixture
C Clearance	P Props
A Avionics	T Transponder
A Approach Briefing	I Indicators (RWY HDG)
P Pre-Landing	L Lights
	T Time